


# 43 LED Monitor

MW3243-F-V2

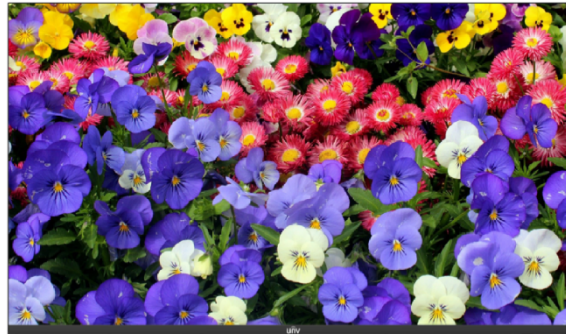

## Features



- 4K UHD display.
- Stable structure design, highly durable, ultra-narrow bezel, ultra-slim depth, light-weight and elegant.
- Industrial-grade panel, 24/7 continuous operation.
- The automatic color and image enhancing engine effectively improves the contrast, details, and edges of the images and to render optimum colors.
- Wide 178° viewing angles allow viewing from almost any direction.
- Silent operation, offering a quiet working environment.
- VESA standard mount enables easy installation.
- Flexible wall mount and stand mount, saving space.

## Specifications


Panel	Description
Panel Type	LED Backlight
Panel Size	43
Pixel Pitch (H*V) (mm)	0.245*0.245
Resolution	3840*2160
Color Support	1.07B
Brightness (cd/m <sup>2</sup> )	300
Contrast Ratio	1200:1
Refresh Rate	60Hz

Response Time (ms)	8
Viewing Angle (H/V)	Horizontal 178° , Vertical 178°
Display size (mm)	941.184*529.416
<b>Interface</b>	<b>Description</b>
Video Input	2* HDMI、 2* DP
Audio Output	3.5mm headphone jack
<b>Speaker</b>	<b>Description</b>
Speaker	2*10W
<b>VESA</b>	<b>Description</b>
VESA (mm)	200*200
Wall-mounted Thread	M6 (10mm deep thread)
<b>OSD</b>	<b>Description</b>
Multi-Language	English, French, Spanish, Portuguese, German, Italian, Dutch, Swedish, Finnish, Polish, Czech, Russian, Korean, Traditional Chinese, Simplified Chinese, Japanese
<b>General</b>	<b>Description</b>
Input Voltage	AC 100 to 240V, 50/60Hz
Typical power consumption (W)	≤100
Standby power consumption (W)	≤0.5
Product Dimensions (W*H*D) (mm)	957*557.1*94.4
Package Dimensions (W*H*D) (mm)	1055*645*141
Weight (Kg)	Net Weight:6.4 Gross Weight:9.5
Operation Temperature	0° C ~ 40 ° C
Operating Humidity	20%~85% (No Condensation)
Storage Temperature	-20° C ~ 60° C
Storage Humidity	10%~90% (No Condensation)
Optional Accessories	HB-4032-E LED Monitor Display Wall Mounting Bracket 、 HB-5043-H Pedestal Support,43 Inch Plastic Case 4K Monitor
Standard	1*HDMI cable、 1*Quick Guide、 1*Remote Control、 1*Power Cable

# Dimensions

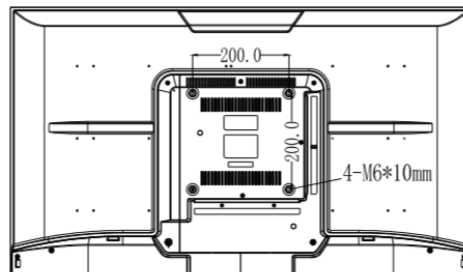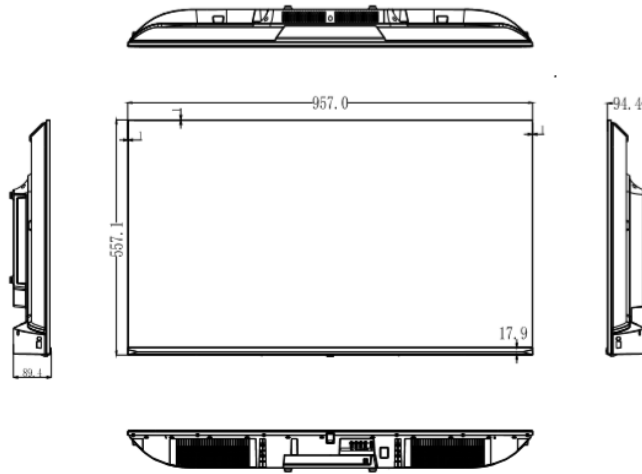

## Interface

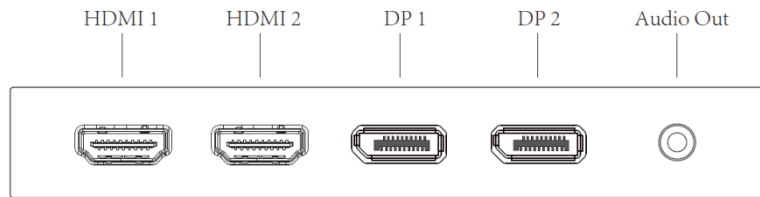

**Zhejiang Uniview Technologies Co., Ltd.**

No. 369, Xietong Road, Xixing Sub-district, Binjiang District, Hangzhou City, 310051, Zhejiang Province, China

Email: [overseasbusiness@uniview.com](mailto:overseasbusiness@uniview.com); [globalsupport@uniview.com](mailto:globalsupport@uniview.com)

<http://www.uniview.com>

©2023-2024 Zhejiang Uniview Technologies Co., Ltd. All rights reserved.

\*Product specifications and availability are subject to change without notice.

\*Despite our best efforts, technical or typographical errors may exist in this document. Uniview cannot be held responsible for any such errors and reserves the right to change the contents of this document without prior notice.