

DHI-LPH65-MC420-C

65 inch Smart interactive whiteboard



Series Overview

Dahua DeepHub Classic Smart Interactive Whiteboard is a new generation of smart interactive whiteboards that have a high performance main controller and multiple intelligent functions. It adopts direct-type LED backlight technology and has a 4K LED display that is built of anti-dazzle tempered glass with a hardness of 7 on the Mohs scale. The display comes in 65", 75", and 86". This ultrathin whiteboard supports up to 10 multi-user writing points and is equipped with a 52 MP lens, speakers, 8 microphone arrays, and is touchscreen. It offers various functions such as video conferencing, writing on the whiteboard, wireless screen sharing and allows you to scan codes to access content on the whiteboard.

Functions

4K HD Display

With up to 3840×2160 resolution, the 4K HD display delivers a clear image in sharp, vivid colors.

Al Recognition of Drawings

Identifies hand-drawn structures such as straight lines, arrowstraight lines, arrow-dotted lines, triangles, parallelograms, trapezoids, rectangles, pentagons, circles, cylinders, pentagrams, semicircles, and ellipse.

Easy to Share

Enhances the experience of sharing files by scanning a code. It automatically determines the network of the device to readily share the QR code across the extranet and the intranet. QR code encryption and extraction are also featured, providing privacy and data security through the required entry of a 6-digit password for verification.

File Management

Supports managing and using Office files, image, video and audio files, and file formats such as PDF and TXT.

- Built-in Deephub Meeting software that offers online conferences and customizable support for real-time collaboration.
- · Displays in 4K Ultra HD and uses 4K UI.
- With its 2 built-in mid-high frequency speakers, the device supports 2.0-channel audio output, and its total power is 40 W.
- Produces vibrant visuals through its NTSC High Gamut Screen that offers wide color coverage up to 90% and its advanced technology that produces accurate color reproduction of ΔE≤1.5.
- Features split screen, and performs screen sharing between the whiteboard and phones, computers, tablets and more devices.
- Microsoft Office and other related software can be installed, and it can play audio and video files in various formats.
- Offers a smooth writing experience through handwriting recognition, pen writing, its fast writing response speed, and pen pressure recognition.
- · Support AI recognition of text and drawings.
- Intelligent pen detection that automatically wakes up the whiteboard for annotations when the pen is lifted.
- Built-in 8 array microphone and AI 48M camera that supports 9× zoom, produces high-quality visuals and audio communication, and supports auto-framing and voice tracking.
- Seamlessly calls the camera and microphone of the whiteboard through its Type-C IN port and screen projector.
- · Supports unlocking through NFC.
- · Includes a full-featured Type-C IN port.

Similar to Real Writing Experience

The electronic whiteboard supports pen-point writing. It comes equipped with specialized pressure-sensitive writing pens, designed to enhance the writing experience. With its soft, comfortable nib, writing on the whiteboard feels natural, similar to the real writing experience.

Wireless Screen Sharing

In addition to basic file sharing, the device offers wireless screen sharing, interactive operations between two screens, and reverse transmissions. It also supports screen grouping (multiple transmission), host mode (for overall permission control), real-time transmission of images, videos and audios from the wireless camera of the mobile phone to the device, and split-screen mode that displays up to 9 splits on the same screen.

Screen Sharing

The content on your screen can be freely shared with one other device through a wired connection.

4K Camera with Ultra-wide FOV

8-MP with a maximum resolution of 4K@30 fps. It supports live videos and has an ultra-wide field of view (diagonal 99°, horizontal 87°, and vertical 49°), displaying vivid images even when placed in relatively large meeting rooms.

| Technical Specification | on | | Wi-Fi Standard |
|-------------------------|---------------------------------------------------------------------------|--------------------------|-----------------------------------|
| Built-in System | | | |
| Operating System | Android 14 | | Wi-Fi Frequency Range |
| CPU Frequency GPU | Quad-core A73 + Quad-core A53 2.2 GHz + 2.0 GHz ARM Mali-G52 MP8 (8EE) | | MAX Power Transmission (Wi-Fi) |
| RAM | 8 GB | | Bluetooth |
| ROM | 64 GB | | Bluetooth Standard |
| Card Swiping with NFC | Yes, supports binding up to 10 cards. | | Bluetooth Frequency Range |
| NFC | Supports quick unlock via NFC. | | MAX Power Transmission |
| Function | | | (Bluetooth) |
| Operating System of | Windows 7/8/10 | | RFID Modulation Method |
| External Module | Dual hand 3.4.6/F.C. Supports anabling between and | | FID Frequency Range |
| Wi-Fi Hotspot | Dual-band 2.4 G/5 G; Supports enabling hotspot and Wi-Fi at the same time | MAX Power Tran (RFID) | smission |
| CD Panel | 65 inch | USB | |
| Backlight | DLED | RS-232 | |
| Aspect Ratio | 16:9 | Video Input | |
| Brightness | 350 cd/m² (typ.) | Video Output | |
| Resolution | 3840 (H) × 2160 (V) | Audio Output | |
| Viewing Angle | H: 178°; V: 178° | Others | |
| Lifespan | ≥50, 000 hrs | IrDA | |
| Display Color | 90% NTSC (typ.) | Microphone | |
| Refresh Rate | 60 Hz | Type-C Port | |
| Static Contrast Ratio | 1200 (typ.) | | |
| | | Touchscreen | |
| Response Time | 8 ms (typ.) | Response Time | |
| Camera | Androids Dhotos E2 MD: Video: 9 MD | Touch Technology | |
| Camera | Android: Photo: 52 MP; Video: 8 MP Windows: Photo: 8 MP; Video: 8 MP | Touch Points | |
| Auto Control | Auto white balance | Valid Touch | |
| Distortion | -8.6% | Writing Mode | |
| Max. Resolution | Photo: 9632 (H) × 5418 (V); Video: 3840 (H) × 2160 (V) | Anti-light Interference | |
| Field of View | D: 99°; H: 87°; V: 49° | Surface Hardness | |
| Face Detection | Yes | Touch Resolution | |
| Digital Zoom | Yes , supports up to 9x zoom. | Number of Multi-user | |
| Device Ports | | Writing Points | |
| Light Sensor | 1 | Speaker | |
| Front Button | 1 × power button | Number of Cavities | |
| Front Ports | 1 × TYPE-C, 1 × HDMI IN, 2 × USB 3.2 Gen1 | Frequency | |
| Network Port | 2 × RJ-45 | Power | |
| Wi-Fi | Yes, 1 × Station, 1 × AP | Built-in Speaker | |
| **(| ics, i A station, i A Ar | | |

| Microphone | | | | |
|------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|--|--|
| Pick-up Distance | Long-range sound pickup: 8 m—12 m (26.25 ft—39.37 ft) | | | |
| Number of Microphones | 8 arrays | | | |
| AGC | Yes | | | |
| Echo Cancellation | Yes | | | |
| Polar Pattern | Omnidirectional | | | |
| Intelligent Noise Filtering | YES | | | |
| General | | | | |
| Power Supply | 100–240 VAC, 50/60 Hz | | | |
| Power Consumption | 220 W (basic), 300 W (max) | | | |
| Operating Temperature | 0 °C to +40 °C (+32 °F to +104 °F) | | | |
| Storage Temperature | -20 °C to +60 °C (-4 °F to +140 °F) | | | |
| Operating Humidity | 10%–90% (RH), non-condensing | | | |
| Storage Humidity | 10%–90% (RH), non-condensing | | | |
| Product Material | Metal casing | | | |
| Protective Glass | 3.2 mm Anti-dazzle tempered glass | | | |
| Casing Color (Frame/Rear) | The left and right sides are black, and the top and bottom are starry gray. | | | |
| Product Dimensions | 1,485.5 mm × 87 mm × 942 mm (58.48" × 3.43" × 37.09") (L × W × H) | | | |
| Frame Size | Top border: 40.9 mm (1.61"), left and right borders: 17.5 mm (0.69"), bottom border: 65.3 mm (2.57") | | | |
| Packaging Dimensions | 1,623 mm × 227 mm × 1,068 mm (63.90" × 8.94" × 42.05") (L × W × H) | | | |
| Net Weight | 41 kg (90.39 lb) | | | |
| Gross Weight | 59.6 kg (131.40 lb) | | | |
| Holes Distance | 500 mm × 400 mm (19.69" × 15.75") | | | |
| Installation | Wall mount; mobile bracket | | | |
| Standby Power Consumption | ≤0.5 W | | | |
| Packing List | 1 × Smart interactive whiteboard 1 × Wireless plug-in module 1 × Power cord 2 × Stylus pen 1 × Quick start guide 1 × Legal and regulatory information 1 × Wall mount bracket 1 × Wall-mount screw package 1 × Remote control | | | |
| Glass Thickness | 3.2 mm | | | |

| Ordering Information | | | | | |
|------------------------------|-------------------|--------------------------------------|--|--|--|
| Туре | Model | Description | | | |
| Smart interactive whiteboard | DHI-LPH65-MC420-C | 65 inch Smart interactive whiteboard | | | |
| Accessories (Optional) | DHI-SP-PI5C72IS | Open Pluggable Specification | | | |

| Туре | Model | Description |
|------------------------|-----------------|-------------------------------------------------------|
| | DHI-PKC-UCOA | USB Camera |
| | DHI-PKC-MS3B | Mobile Stand |
| | DHI-PKP-IP1A | Smart Pen |
| | DHI-SP-PI7C75IS | Open Pluggable Specification |
| | DHI-SP-PI5C75IS | Open Pluggable Specification |
| | DHI-SP-PI5C82IS | Open Pluggable Specification |
| | DHI-PKP-WP0B | Domestic General 22 inch Smart interactive whiteboard |
| Accessories (Optional) | DHI-SP-PI7C72IS | Open Pluggable Specification |
| | DHI-PKP-WP1B | Wireless transmitter |
| | DHI-PKC-WM1A | Omnidirectional Digital Microphone |
| | DHI-PKC-MS2B | Mobile Stand |
| | DHI-PKC-MSOC | DHI-PKC-MSOC |
| | DHI-PKC-MS1C | Mobile Stand |
| | DHI-PKC-UCOB | USB Camera |
| | DHI-PKC-MS0A | DHI-PKC-MS0A |
| | DHI-PKC-MS1A | DHI-PKC-MS1A |
| | DHI-SP-PI7C82IS | Open Pluggable Specification |

Accessories

Optional:



DHI-PKC-MS0A DHI-PKC-MS0A





DHI-PKC-MS1C Mobile Stand



DHI-PKC-MS0C DHI-PKC-MS0C



DHI-PKC-MS2B Mobile Stand




DHI-PKC-MS1A DHI-PKC-MS1A



DHI-PKC-MS3B Mobile Stand



DHI-PKC-UCOA USB Camera



DHI-PKC-UCOB USB Camera



DHI-PKC-WM1A Omnidirectional Digital Microphone

Optional:



DHI-PKP-IP1A Smart Pen



DHI-PKP-WPOB
Domestic General 22
inch Smart interactive
whiteboard



DHI-PKP-WP1B Wireless transmitter



DHI-SP-PI5C72IS Open Pluggable Specification



DHI-SP-PI5C75IS Open Pluggable



DHI-SP-PI5C82IS Open Pluggable Specification






Specification




DHI-SP-PI7C72IS DHI-SP-PI7C75IS
Open Pluggable
Specification Specification

DHI-SP-PI7C82IS Open Pluggable Specification

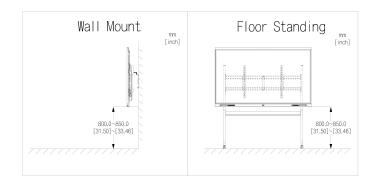

Dimensions (mm[inch])

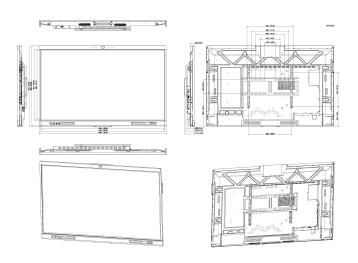

Panels

