

DH-HAC-PT1239A-A-LED

2MP Full-color HDCVI Fixed-focal PT Camera



Series Overview

The Lite Series is a great choice for consumers looking for high quality monitoring products at a reasonable price. Its low cost and high performance make it ideal for residential areas and SMB solutions. This series is equipped with a wide range of technologies, such as full-color and starlight, providing various solutions for different scenarios.

Functions

Full-color

With its advanced image processing algorithm and capability to absorb large quantities of light, the camera provides 24/7 color monitoring that collects clear and highly detailed information, significantly increasing the reliability of the human and vehicle images that are collected as evidence for intelligent analysis.

Smart Area Lighting

Automatically adjusts the intensity of the brightness and exposure for the left and right areas in the video based on the proportion and position of the targets to reveal more details in the image.

Pan & Tilt

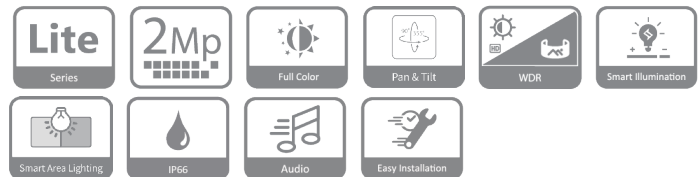
Developed with a PT design, it has a dual shaft and dual motor. The motor can control the pan range from 0° to 355° and the tilt range from 0° to 90°, covering all the corners without any dead angles. This extends the monitoring area.

Wide Dynamic Range

With its advanced Wide Dynamic Range technology (WDR), the camera captures highly detailed images and produces high-definition recordings in high-contrast lighting conditions, and in scenes with backlighting or shadows.

* The parameters and datasheets below can only be applied to PT1239-S2 series.

- Max. 30 fps@1080p.
- 130 dB true WDR, 3D NR.
- 24/7 color imaging.
- Smart Area Lighting.
- Pan & Tilt.
- 40 m illumination distance.
- Super Adapt.
- Built-in Mic.
- Quick-to-install structure saves installation time.
- 3.6 mm fixed lens (2.8 mm optional).
- IP66, 12 VDC.



Broadcast-quality Audio

Audio signal transmission over coaxial cables is supported by the HDCVI camera. It adopts a unique audio processing and transmission technology that restores source audio and eliminates noise, ensuring the quality and reliability of the audio information that is collected. This becomes important for video surveillance applications that use audio information as a type of supplementary evidence.

Smart Warm Light Illumination

In dark environments, the camera produces vivid images in rich color through its warm LED lights. With its smart light mode setting, it automatically adjusts its exposure time and light sensitivity to avoid the overexposure of objects in the center of the image.

Easy Installation

HDCVI PT camera comes with a quick-to-install design, which makes it easier to install than conventional camera and reduces cost on time and labor.

Super Adapt

With its intelligent algorithm, the camera automatically adjusts its parameters to provide optimal performance and vivid images.

4 Signals over 1 Coaxial Cable

HDCVI technology supports 4 signals (video, audio*, data and power) which are simultaneously transmitted over a coaxial cable. Dual-way data transmission allows the HDCVI camera to interact with the XVR to perform various actions such as sending control signals and triggering alarms. HDCVI technology also supports PoC, which makes the camera easy and quick to install.

* Audio input is available for select HDCVI camera models.

Technical Specification					
Camera					
Image Sensor		2 MP CMOS			
Max. Resolution		1920 (H) × 1080 (V)			
Scanning System		Progressive			
Electronic Shutter Speed		PAL: 1/25 s–1/100000 s NTSC: 1/30 s–1/100000 s			
Min. Illumination		0.001 lux@F1.6 (Color, 30 IRE) 0 lux (Illuminator on)			
S/N Ratio		>65 dB			
Illumination Distance		40 m (131.23 ft)			
Illuminator On/Off Control		Auto			
Illuminator Number		4 (Warm light)			
Angle Adjustment		Pan: 0°–355° Tilt: 0°–90° *DO NOT adjust the angle of the main body or enclosure manually			
Lens					
Lens Type		Fixed-focal			
Auto Focus		No			
Lens Mount		M12			
Focal Length		2.8 mm;3.6 mm			
Max. Aperture		F1.6			
Field of View		2.8 mm: H: 106°; V: 56°; D: 127° 3.6 mm: H: 86°; V: 46°; D: 101°			
Iris Control		Fixed			
Close Focus Distance		2.8 mm: 0.8 m (2.62 ft) 3.6 mm: 1.1 m (3.61 ft)			
DORI Distance	Lens	Detect	Observe	Recognize	Identify
	2.8 mm	43.9 m (144.03 ft)	17.5 m (57.41 ft)	8.8 m (28.87 ft)	4.4 m (14.44 ft)
	3.6 mm	53.7 m (176.18 ft)	21.5 m (70.54 ft)	10.7 m (35.10 ft)	5.4 m (17.72 ft)
Video					
Video Frame Rate		CVI: PAL: 1080p@25 fps; NTSC: 1080p@30 fps; AHD: PAL: 1080p@25 fps; NTSC: 1080p@30 fps; TVI: PAL: 1080p@25 fps; NTSC: 1080p@30 fps; CVBS: PAL: 960H; NTSC: 960H			
Resolution		1080p (1920 × 1080); 960H (960 × 576/960 × 480)			
Day/Night		Color			
BLC		BLC; WDR; HLC			
WDR		130 dB			
White Balance		Auto;Area white balance			
Gain Control		Auto			
Noise Reduction		3D NR			
Illumination Mode		Smart Light			
Mirror		Yes			
Privacy Masking		Off/On (8 areas, rectangle)			
Certification					
Certifications		CE-LVD: EN 62368-1; CE-EMC: EN 55032; EN 55035			
Port					
Video Output		Video output choices of CVI/TVI/AHD/CVBS by one BNC port			
Audio Input		One channel built-in Mic			
Power					
Power Supply		12 VDC ± 30% (It is recommended to use a power adapter to supply the power for one camera)			
Power Consumption		Max 6.2 W (12 VDC, LED on)			
Environment					
Operating Temperature		–40 °C to +60 °C (–40 °F to +140 °F)			
Operating Humidity		<95% (RH), non-condensing			
Storage Temperature		–40 °C to +60 °C (–40 °F to +140 °F)			
Storage Humidity		<95% (RH), non-condensing			
Protection		IP66			
Anti-corrosion Level		Basic Protection			
Structure					
Casing Material		Plastic			
Product Dimensions		92.9 mm × 91.3 mm × 130 mm (3.66" × 3.59" × 5.12")			
Net Weight		0.38 kg (0.84 lb)			
Gross Weight		0.62 kg (1.37 lb)			
Installation		Wall mount; ceiling mount; vertical pole mount			

Ordering Information		
Type	Model	Description
2MP Camera	DH-HAC-PT1239AP-A-LED	2M Full-color HDCVI PT Camera, PAL
	DH-HAC-PT1239AN-A-LED	2M Full-color HDCVI PT Camera, NTSC
Accessories (Optional)	PFA12C	Plastic Junction Box
	PFM800-E	Passive HDCVI Balun
	PFM321D	12V 1A Power Adapter
	PFM904	Integrated Mount Tester

Accessories

Optional:



PFA12C
Plastic Junction Box





PFM800-E
Passive HDCVI Balun



PFM321D
12V 1A Power Adapter



PFM904
Integrated Mount Tester

Ceiling Mount	Ceiling Mount	Wall Mount
		
Pole Mount(Vertical)		
		

Dimensions (mm[inch])

